



Instructions

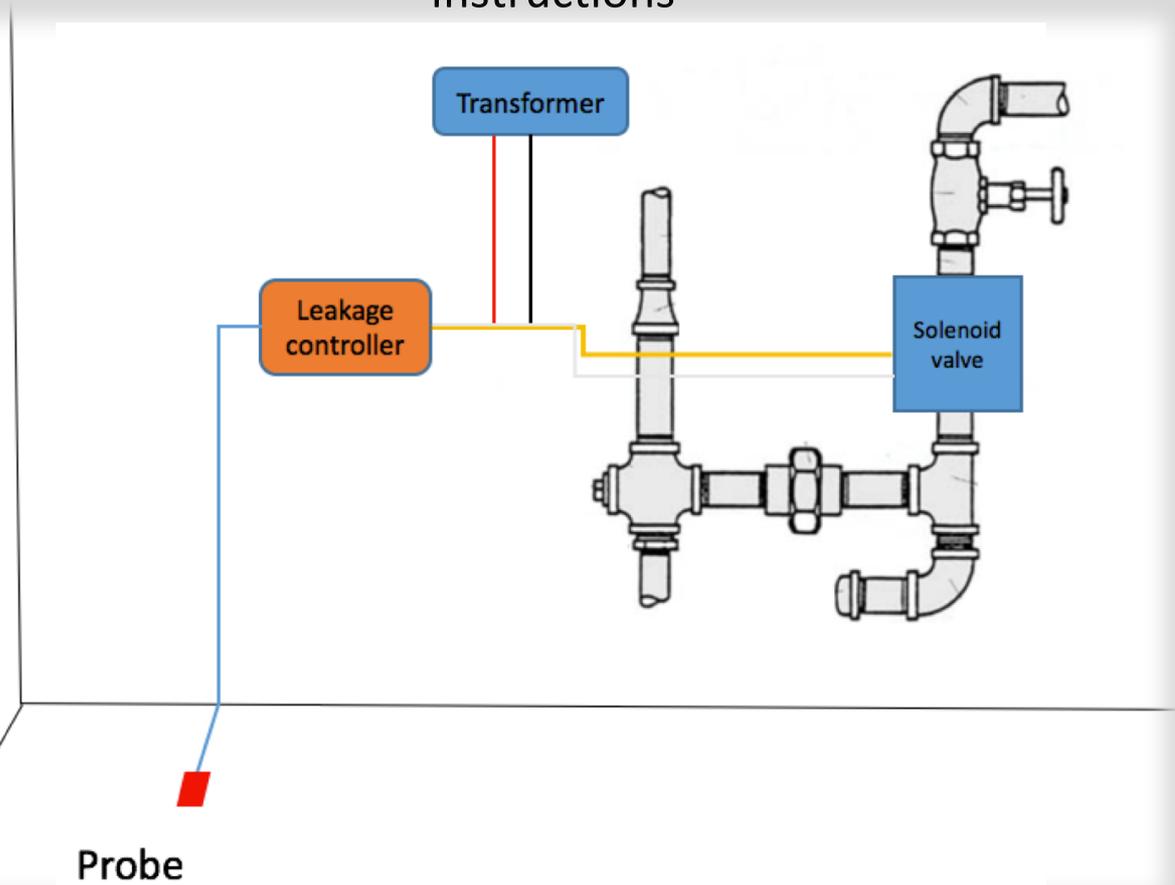

Probe

Installations

- 1 Install a solenoid valve in your water inlet pipe line.
- 2 Use a velcro to attach Leakage Controller on wall.
- 3 Place the probe on the bottom of ground.
- 4 Connect input power 24VDC transformer and Leakage Controller (red & black)
- 5 Connect solenoid valve and Leakage Controller (yellow & white)

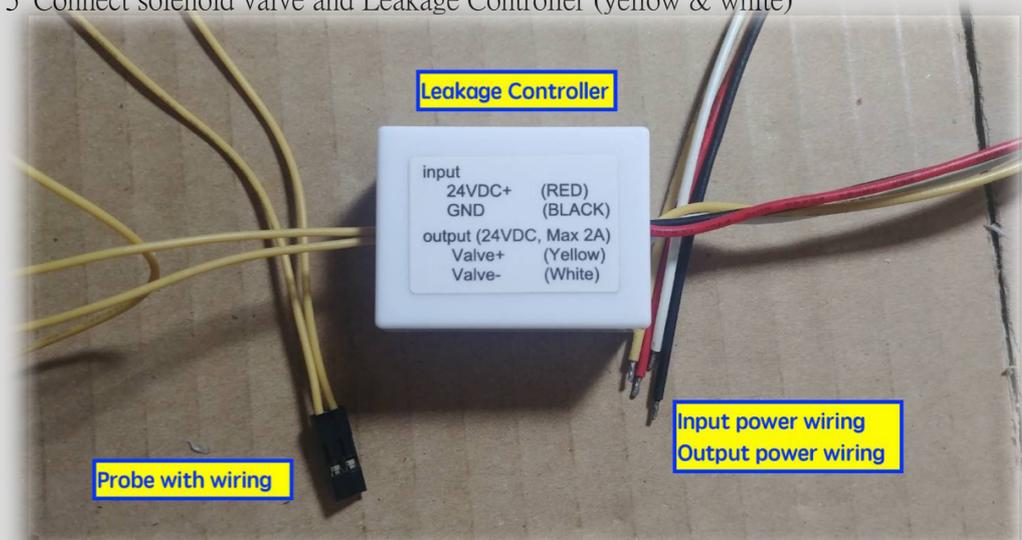

Scope of supply

- 1 Leakage Controller (with beeper alarm): 4cmX3cmX2cm, 35g
- 2 Probe with wiring: wiring 75cm
- 3 Input power wiring
- 4 Output power wiring